

M. BILAL EXPORTS



M. BILAL EXPORTS

“Shelter For All”



CONTENT

▶ Family Tent (UNHCR / UNICEF / IOM)STANDARD-----	01
▶ Family Tent (ICRC / IFRC) STANDARD-----	02
▶ Family Tent (SPECIAL EDITION)-----	03
▶ Geodesic Family Tent (ICRC STANDARD)-----	04
▶ Dispensary Tent POLY COTTON-----	05
▶ Multipurpose Tent-----	06
▶ Warehouse Tent (IFRC / ICRC STANDARD)-----	07
▶ Relief Ridge Pole Tent (NDMA / PDMA STANDARDS)-----	08
▶ Winterized Tent (NDMA / PDMA STANDARD)-----	09
▶ Frame Tent (NDMA / PDMA STANDARD)-----	10
▶ Fleece Blanket (UNHCR / IFRC / ICRC / TYPE)-----	11
▶ Kitchen Sets (UNHCR TYPE)-----	12
▶ Mat-----	13
▶ Jerrycan (UNICEF / UNHCR)-----	14
▶ Hygiene Kit (UNICEF TYPE)-----	15

FAMILY TENT (UNHCR / UNICEF / IOM STANDARD)



FLAME RETARDANT
CPAI-84 / 6



FUNGI / MOLD
RESISTANT



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



SOIL BURIAL
TEST APPROVED



MAIN MATERIALS

OUTER TENT	Roof:approx.380 gsm polyester-cotton-fire,water,rot and UV proof Wall:approx.250 gsm polyester-cotton-fire.water,rot and UV proof
INNER TENT	160 gsm polyester-cotton-fire & rot proof-cream color
GROUND SHEET	Sewn in bathtub ground sheet made of woven PE 180 gsm FR
MUD FLAP	Woven PE-180 GSM ICRC/IFRC standard
MOSQUITO NETTING	Polyester PVC coated
POLES	1 ridge pipe 4m 2 upright poles 2;2 m 6 side poles 1,25 cm 4 door poles 1.4 m
PEGS	6 Vpegs (25 x 25 x 3mm)35 cm 4 candy cane pegs 30 cm 26 op pegs 23 cm
COLOR	Natural white / beige

DIMENSIONS

LENGTH x WIDTH OUTER TENT	660 x 400cm	FLOOR AREA	23m ²
CENTRAL HEIGHT	220 cm	VESTIBULE	16 m ²
DOOR HEIGHT	140 cm	LENGTH X WIDTH INNER TENT	395 X 380 cm
WALL HEIGHT	125 cm	CENTRAL HEIGHT INNER TENT	210 cm
WEIGHT	63 Kg	INNER SIDE WALL HEIGHT	115 cm

TENT FEATURES

DOORS	2 door outer tent (130 x 140 cm),1 front and 1 back 2 door inner tent (100 x 175cm),1 front and back
WINDOWS	2 long side windows outer tent (360 x 60 cm), inner tent has two windows of equal size
VENTILATION	2 ventilation opening , front and back
CHIMNEY	1 chimney reinforcement in and outer tent

PACKING & LOADING

PACKING UNIT (P.U)	Tent in PE bag, with seperated webbing bands + handle
CONTENT P.U	Tent, inner tent with groundsheet,poles,accessories and hammer
QTY P.U	1 piece
VOLUME P.U:	0.16 m ³
LOADING	PER 20 FT DC 170 pcs unpalletized 150 pcs palletized PER 40 FT DC 310 pcs unpalletized 300 pcs palletized PER 40 FT HC 350 to 380 pcs unpalletized 300 pcs palletized

FAMILY TENT (ICRC/ IFRC) STANDARD



FUNGI / MOLD
RESISTANT



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



SOIL BURIAL
TEST APPROVED



MAIN MATERIALS

OUTER TENT	Roof:approx.380 gsm polyester-cotton, water,rot and UV proof Wall:approx.250 gsm polyester-cotton.water,rot and UV proof
INNER TENT	130 gsm polyester-cotton rot proof-cream color
GROUND Sheet	Sewn in bathtub ground sheet made of woven PE 180 gsm
MUD FLAP	Woven PE-180 gsm ICRC/IFRC standard
MOSQUITO NETTING	Polyester PVC coated
POLES	1 ridge pipe 4m 2 upright poles 2,2 m 6 side poles 1,25 cm 4 door poles 1,4m
PEGS	6 V pegs (25 x 25 x 3mm)35 cm 4 candy cane pegs 30 cm 26 o pegs 23 cm
COLOR	Natural white or beige

DIMENSIONS

LENGTH x WIDTH OUTER TENT	660 x 400cm	FLOOR AREA	23 m ²
CENTRAL HEIGHT	220 cm	VESTIBULE	16 m ²
DOOR HEIGHT	140 cm	LENGTH X WIDTH INNER TENT	395 X 380 cm
WALL HEIGHT	125 cm	CENTER X HEIGHT INNER TENT	210 cm
WEIGHT	63 kg	INNER SIDE WALL HEIGHT	115 cm

TENT FEATURES

DOORS	2 door outer tent (130 x 140 cm),1 front and 1 back 2 door inner tent (100 x 175cm),1 front and back
WINDOWS	2 long side windows outer tent (360 x 60 cm)
VENTILATION	2 ventilation openings , front and back
CHIMNEY	1 chimney reinforcement in and outer tent

PACKING & LOADING

PACKING UNIT (P.U)	Tent in PE bag, with seperated webbing bands + handle
CONTENT P.U	Tent, inner tent with groundsheet,poles,accessories and hammer
QTY P.U	1 piece
VOLUME P.U	0.16 m ³
LOADING	PER 20 FT DC 170 pcs unpalletized 150 pcs palletized PER 40 FT DC 310 pcs unpalletized 300 pcs palletized PER 40 FT HC 350 to 380 pcs unpalletized 300 pcs palletized

FAMILY TENT (SPECIAL EDITION)



SEMI FLAME
RETARDANT



FUNGI / MOLD
RESISTANT



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



MAIN MATERIALS

OUTER TENT	350 gsm waterproof, Semi Fire retardant, Rot Proof Canvas Fabric
	Wall : 200 gsm waterproof, Semi Fire retardant, Rot Proof Canvas Fabric
INNER TENT	120 gsm waterproof, Semi Fire retardant, Rot Proof Canvas Fabric
VESTIBULE	2(FRONT & Back)0.50 M
GROUND SHEET	PE laminated Ground sheet attached with inner tent in bath tube style
MUD FLAP	PE 180 gsm
MOSQUITO NETTING	Polyester
POLES	3x Standing Poles 1 Ridge Pole (2 PCS)4xDoors Poles, 6xSide Wall poles
PEGS/PINS	12 iron PCS,V, pegs 4-PCS,iron pins :24
COLOR	Natural white / beige

DIMENSIONS

LENGTH x WIDTH OUTER TENT	3 X 4 Mtr	FLOOR AREA	12 m ²
CENTRAL HEIGHT	2.20 Mtr	VESTIBULE (Front & Back)	3m ²
DOOR HEIGHT	1.40Mtr	LENGTH x WIDTH INNER TENT	3 X 3 Mtr
WALL HEIGHT	1.25Mtr	CENTRAL HEIGHT INNER TENT	2.10Mtr
WEIGHT	40 kg	INNER SIDE WALL HEIGHT	1.15 Mtr

TENT FEATURES

DOORS	1 front 1.20X1.40 M
WINDOWS	2 windows of full length with Mosquito mesh and canvas flap
VENTILATION	2 ventilation one on each top of vestibule with closing flapmesh
CHIMNEY	1 chimney opening size: 25-CMX45 on the vestibule

PACKING & LOADING

PACKING UNIT (P.U.)	1 piece Tent in PE bag, with separated webbing bands + handle with all accessories
VOLUME P.U	0.136 m ³
LOADING	PER 20 FT DC 225 pcs unpalletized 200 pcs palletized
	PER 40 FT DC 480 pcs unpalletized 350 pcs palletized
	PER 40 FT HC 500 pcs unpalletized 380 pcs palletized

GEODESIC FAMILY TENT (ICRC STANDARD)



FLAME RETARDANT
CPAI-84/6



FUNGI / MOLD
RESISTANT



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



DISINFECTABLE



DESCRIPTION

Basic Living Unit for Emergency
5 person self-standing geodesic family tent

MAIN MATERIALS

OUTER TENT	Woven PE - ICRC/IFRC standard
GROUND SHEET	Woven PE - ICRC/IFRC standard
SHADE COVER	Woven PE - ICRC/IFRC standard
MOSQUITO NETTING	Polyester PVC coated
POLES	5 identical poles 834 cm l (Aluminium 6061-T6 Ø 18,5 mm)
PEGS	6 T Pegs (25 x 25 x 3 mm) 40 cm
COLOR	White

DIMENSIONS

LENGTH x WIDTH OUTER TENT	570 X 435 cm
CENTRAL HEIGHT	250 cm
DOOR HEIGHT	170 cm
SHADE COVER SURFACE	20 m ²
WEIGHT	46,5 kg

PACKING & LOADING

PACKING UNIT (P.U.)	250 cm 570 PE bag, with separated webbing bands + handle
CONTENT P.U	Shade cover, outer tent, inner separation, accessories, hammer and repair kit
QTY P.U.	1 piece
VOLUME P.U	0.17 m ³
LOADING	PER 20 FT DC 140 pcs unpalletized 120 pcs palletized PER 40 FT DC 280 pcs unpalletized 264 pcs palletized PER 40 FT HC 340 pcs unpalletized 264 pcs palletized

DISPENSARY TENT POLY COTTON

(27.5 SQM / 33.6 SQM / 45 SQM) MSF/ICRC/IFRC STANDARD



FLAME RETARDANT
CPAI-84/6



FUNGI / MOLD
RESISTANT



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



SOIL BURIAL
TEST APPROVED



DESCRIPTION

Multipurpose tent, can be for storage, hospital, dispensary, school, office

MAIN MATERIALS

OUTER TENT	Wall : 320 gsm polyester cotton-water, rot and UV proof
MUD FLAP	550 gsm polyester with PVC coating on the both side -water, rot and UV proof
GROUND SHEET	550 gsm polyester with PVC coating on the both side -water, rot and UV proof

DIMENSIONS

	27.5 SQM	33.6 SQM	45 SQM
LENGTH x WIDTH OUTER TENT	500 x 560 cm	600 x 560 cm	600 x 750cm
FLOOR SURFACE	27,5 sqm	336sqm	45 sqm
CENTRAL HEIGHT	250 cmf	300cm	300 cm
WALL HEIGHT	180 cm	211cm	211 cm
WEIGHT	148 kg	130 kg	208 kg
FRAME	30 x 1,5 mm	42 x 2 mm	42 x 2 mm

PACKING

PACKING UNIT (P.U)	PVC bag
CONTENT P.U	Tent, frame,groundsheet,accessories and hammer
QTY P.U	1 piece

LOADING

	27.5 SQM	33.6 SQM	45 SQM
VOLUME P.U	0,435 m ³	0,435 m ³	0.765 m ³
	PER 20 FT DC 72 pcs palletized	PER 20 FT DC 48 pcs palletized	PER 20 FT DC 36 pcs palletized
	PER 40 FT DC 144 pcs palletized	PER 40 FT DC 96 pcs palletized	PER 40 FT DC 72 pcs palletized
	PER 40 FT HC 144 pcs palletized	PER 40 FT HC 96 pcs palletized	PER 40 FT HC 72 pcs palletized

MULTIPURPOSE TENT

SCHOOL TENT 24, 42, 72 SQM UNICEF Standards



FLAME RETARDANT
CPAI-84/6



GOOD WIND
RESISTANCE



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



DISINFECTABLE



DESCRIPTION

Multifunctional tent, can be used for storage, hospital; dispensary, school, office, ...

MAIN MATERIALS

OUTER TENT LINER	Woven PE 250 gsm - water, rot and UV proof - FR CPAI-84 Section 6
FRAME	Galvanised steel pipe Ø 30 x 1,2 mm with steel cross pieces
GROUND SHEET	Woven PE 250 gsm - water; rot and UV proof
WINDOWS	2 per side 145 x 150 cm 3 layered: roll-up PE flap, fixed mosquito mesh and transparent PVC roll-up flap
PEGS	The tent comes with 40 cm T-pegs
DOOR	1 Per gable 210 x 140 cm

	24 m ²	42 m ²	72m ²
WEIGHT	176 KG	240 KG	347 KG
PACKING VOLUME	0,72 m ³	0,93 m ³	139 m ³
LENGTH X WIDTH OUTER TENT	400 x 600 cm	700 x 600 cm	1200 x 600 cm
CENTRAL HEIGHT	290 cm	290 cm	290 cm
DOOR HEIGHT	190 cm	190 cm	190 cm
WALL HEIGHT	205 cm	205 cm	205 cm
FLOOR AREA	24 m ²	42 m ²	72 m ²
PACKING IN NAIL WOODEN BOXES	2	2	3

CONTENT P.U.

Tent, frame, accessories and hammer

LOADING	24 m ²	42 m ²	72m ²
VOLUME P.U	0.72 m ³	0.93 m ³	1.39 m ³
	20 PER FT DC 40 pcs palletized	PER 20 FT DC 30 pcs palletized	PER 20 FT DC 20 pcs palletized
	PER FT DC 80 pcs palletized	PER 40 FT DC 60 pcs palletized	PER 40 FT DC 40 pcs palletized
	PER FT DC 80 pcs palletized	PER 40 FT DC 60 pcs palletized	PER 40 FT DC 40 pcs palletized

WAREHOUSE TENT(IFRC / ICRC STANDARDS)



SIZE	Span width is 10m, length is 25m, Bay distance is 5m Side Wall Height: 3 Mtr	
RIDGE HEIGHT	4.6m	
MATERIAL	Cover material is white PVC fabric 850g/m ² for roof and 650g/m ² for side walls. Double PVC-Coated Polyester, 100% CE certified flame retardant, UV resistance, waterproof, comply to DIN 4102 B1, M2	
MAIN FRAME:	122x68x3mm, High Reinforce Aluminum, anti-rust surface, GB6061-T6, anodized surface handling for surface, silver color, 4 channels; Brand New heavy duty, prefabricated.	
GALVANIZED STEEL CONNECTIONS	Hot-DIPPED Galvanized Steel Connections	
EXPANSION BOLTS	to fix the tent on cement ground	

PACKING & LOADING

VOLUME	7.33 m ³	
20 FT STD	6 PCS Unpalletized	4 PCS Palletized
40 FT STD	11 PCS Unpalletized	8 PCS Palletized
40 FT STD	13 PCS Unpalletized	9 PCS Palletized

RELIEF RIDGE POLE TENT (NDMA / PDMA STANDARDS)



GOOD WIND
RESISTANCE



EASY SETUP



ALL CLIMATES



UV RESISTANT




WATER PROOF



DISINFECTABLE



FUNGI / MOLD
RESISTANT

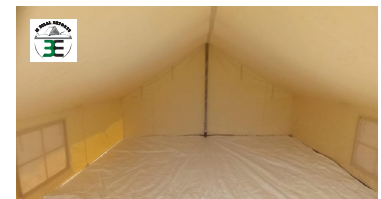

SPECIFICATION

FAMILY TENT DOUBLE FLY SINGLE FOLD, HAVING STANDARD SIZE 4 X 4 METERS, WITH GROUND SHEET OF PE MATERIAL.

MATERIAL

OUTER FOLD OF HEAVY WATER PROOF, ROT PROOF COTTON CANVAS.

WEIGHT 420 – 450 GSM (+/-5%).

INNER FOLD OF HEAVY WATER PROOF, ROT PROOF COTTON CANVAS
WEIGHT 420-450GSM (+/- 5%).

DIMENSIONS

SIZE	4x4 meters	FRONT HOOD	Canvas or PE material
MINIMUM RIGID LENGTH	4 meters	Windows set with good quality digital mesh.	
MINIMUM CENTRAL HEIGHT	2 meters		
MINIMUM SIDE WALL	0.9 meters	Option 1: All around Velcro Patches.	
		Option 2: Tightening & losing ropes..	
SIZE OF OUTER FLAP	12 inches must		

TENT FEATURES

WINDOWS ON BOTH SIDE	2 x 2 fts.
COLOUR	off white or light Green
WEIGHT	45-50 kgs.
POLES	Two standing iron poles of M.S. Pipe of 1.5 inch of 15SWG with base
GROUND SHEET	P.E Ground sheet (150gsm) – 4 x 4 meters.
MUD FLAP	P.E Mud flap (150 gsm) – 10 inches must.
HAMMER	1 x imported quality hammer of approx. 2-3 kg.
PEGS	10 x pegs of large size for outer pitching (MS bar 5/8"x14").
PINS	16 x pins for mud flap pitching (MS bar 3/8"x8").
PACKING	3 x packing bags, one each for the tent canvas, tents poles and accessories.

WINTERIZED TENT (NDMA/PDMA STANDARDS)



GOOD WIND
RESISTANCE



EASY SETUP



ALL CLIMATES



UV RESISTANT




WATER PROOF



DISINFECTABLE



FUNGI / MOLD
RESISTANT

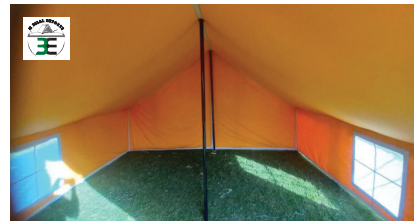

MAIN MATERIALS

SIZE	4X4 M Winterized Tent 3 PCs Double/Fly four layered, Centre Height 2.15 Mtr	FLOOR MAT	Plastic floor mat size: 4x4 Mtr
OUTER FOLD	Waterproof Cotton canvas 500 gsm (5% +/-)	MUD FLAP	PE mud flap 150 gsm 10 inches minimum
INNER FOLD	Waterproof Cotton canvas 500 gsm (5% +/-)	ROPE	8 mm cotton solid manila ropes 4x good quality ropes of 3 mtrs on each side of tent and 02x ropes of 4 meters on front and back of the tent
INNER LINING	Dyed yellow lining inner fold 130 gsm (5% +/-)	HAMMER	1X imported quality of hammer approx 2-3 Kg
HEAT INSULATION	Black cords I Metal spring or eleastic shock absorbers I Red metal guy runner	POLES	3x Standing Poles 1 Ridge Pole , Weight 11.50 kg
GROUND SHEET	PE sheet 150 gsm		
PEGS/PINS	18 Iron pins solid Iron both small and big		
COLOR	Natural white / beige		

MAIN MATERIALS

DOOR AND WINDOWS	Doors and windows with two options for opening and closing Option #1 : All around Velcro patches Option #2 : Tightening & Losing Ropes
------------------	--

PACKING UNIT (P.U.)

Tent and accessories in one bundle wrapped in high quality canvas bag with permanent printing of logos NDMA/PDMA
--

FRAME TENT (NDMA / PDMA STANDARDS)



GOOD WIND
RESISTANCE



EASY SETUP



ALL CLIMATES



UV RESISTANT



WATER PROOF



DISINFECTABLE



FUNGI / MOLD
RESISTANT



SPECIFICATION

CAPACITY	30 x Person	DOORS	2 Nos
SIZE	6 x 8 M	WINDOWS	8 Nos ,size :24 inch x 30 inch
CENTRE HEIGHT	10 FT	MATERIAL	Polyester Water Proof Canvas (Outer), Cotton Canvas (GSM:600 approximately).
HEIGHT OF WALL	6.5 Feet		
WEIGHT	275 to 300 Kg.		

ACCESSORIES

POLE	14 gauge	1 x imported quality hammer of approx 2-3 kg
WALL PIPE WITH BASE	10 Nos	Installation guide book must be included explaining step by step pitching of the tent, all poles, pipes & joints should be numbered.
RIDGE PIPE	12 Nos	All metal parts should be properly painted with good quality coating and finish
SLOPE PIPE	10 Nos	Doors and windows with two options for opening and closing.
JOINTS	15 Nos	Option 1: All around Velcro Patches.
		Option 2: Tightening & losing ropes.
		Ground sheet with plastic mats covering all area of the inside of the tent.
		NDMA's (colored) Logo of one-meter dia on both sides of the tent
		Rope Manilla Cotton.

PACKING AND PRINTING

One packing Bag for Tent.
One packing Bag for Frame Set. One packing Bag for Joints & Pegs
Packing of tent and accessories in one bundle wrapped in high quality canvas bag.

FLEECE BLANKET (UNHCR / IFRC/ICRC/TYPE) MEDIUM THERMAL



BASIC SPECIFICATION

MAKE	Fleece on both side	COLOR	Dark Grey
CONTENTS	100 % Polyester	LOGO	One logo printed or inserted on blanket
TOG	Min 2.5	EDGES	Whipped Seam
SIZE THICKNESS	150 x 200 cm	PACKING	20 pieces in a Bales
STRENGTH	250 N warp & weft		

HIGH THERMAL



BASIC SPECIFICATION

MAKE	Fleece on both side	LOGO	One logo printed or inserted on blanket
CONTENTS	100 % Polyester	EDGES	Whipped Seam
TOG	Min 2.5	PACKING	20 pieces in a Bales
SIZE THICKNEES	150 x 200 cm	STRENGTH	250 N warp & weft



KITCHEN SETS (UNHCR TYPE) FOR FAMILY OF 5 PERSONS



BASIC SPECIFICATION UNHCR Type Kitchen Sets

- 1 x 7 liters aluminum cooking pot with lid & 2 cast aluminum handles
- 1 x 5 liters aluminum cooking pot with lid & 2 cast aluminum handles
- 5 x Deep stainless steel or aluminum plates
- 5 x stainless steel or aluminum cups
- 5 x stainless steel table spoons
- 1 x kitchen knife with stainless steel blade
- 1 x stainless steel serving spoon


KITCHEN SETS (UNHCR B TYPE)



BASIC SPECIFICATION FOR FAMILY 5 PERSONS

- | | |
|---|---|
| 1 Cooking Pot, 7 L (The Frying Pan Should serve As Lid) | 1 x spoon, Wooden, Stirring, 30cm |
| 1 Cooking Pot, 2.5 L (Used as Lid for the 7LCooking Pot) | 1 xServing Spoon, 35ml, Stainless Steel |
| 1 x Cooking Pot, 5 L, With Lid | 2 x Serving Spoons, 35ml, Stainless Steel |
| 5 x Bowl, 1L, Metallic | 5 x Cup, 0.3L, Stainless Steel or Plastic |
| 5 xPlate, 0.75L, Metallic | 5 x Knife, Table, 17cm, Stainless steel |
| 5 xSpoon, Table, 10ml, Stainless steel | 1 x Knife, Kitchen, 15cm, Stainless steel |
| 5 x Fork, Table, 17cm, Stainless steel | 1 xScouring pad |

MAT

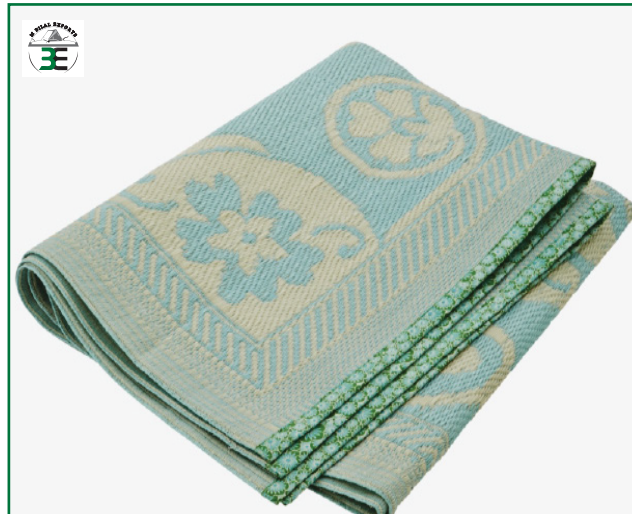

BASICE SPECIFICATION

MAKE	The mat made of 100% synthetic yarns in a tightly woven 2 /2 twil structure using a monofilament warp and flat tape weft. All the edges secured either with a woven, bias binding rope wiyh stitches, zig-zag type, through the fabric of the mat. The binding is secured durable to prevent the fraying of the mat, which will result in rapid disintegration of the structure
MATERIAL	Waterproof, tear proof material and trim finished.
COLOR	Assorted Colors / Design
SIZE	1.80 x 0.90 Meters
WEIGHT	810 grams / piece

PLASTIC BUCKETS



BASICE SPECIFICATION

MAKE	Heavy duty plastic bucket with handle and lid
MATERIAL	HPPE high density polyethylene
COLOR	Any Colors
CAPACITY	10 ,15 , 20 Liters
WEIGHT	500 -800 grms +- 5%



JERRYCAN UNICEF/ UNHCR



DESCRIPTION

Rectangular shape collapsible jerrycan for household water collection and storage

Capacity: 10 L with built -in carrying handle

MAIN MATERIALS

MATERIAL BODY	Food grade LDPE
MATERIAL CP	Polymer
COLOR	Translucent, UV stabilized
HANDLE	One built-in carrying handle with no sharp edges

DIMENSIONS

AVERAGE THICKNESS	Approx. 0,6 mm
CAP DIAMETER	Ø 50 mm (UNICEF/ Ø 31 mm UNHCR)
WEIGHT	Min. 190 g

PACKING

PACKING UNIT (P.U.)	Carton boxes
QTY P.U	100 pcs



All items packed in parachute bag

Contact us

HEAD OFFICE

📍 15 - D New Garden Block, Behind Lyallpur
Galleria Mall, Faisalabad- Pakistan

✉ E-mail : bilal.saeed@bilalexports.net
sales@bilalexports.net

🌐 URL: www.bilalexports.net

☎ Landline : +92 41 8520937-38

☎ Cell : +92 322 7665000

FACTORY ADDRESS

📍 Chak No. 103,R.B, 6 KM, Main Khurrianwala
Jaranwala Road, Chaudhry Wala Stop, Tehsil
jaranwala, District Faisalabad, Punjab 38000 Pakistan

✉ E-mail : bilal.saeed@bilalexports.net
nida@bilalexports.net

🌐 URL: www.bilalexports.net

☎ Landline : +92 41 8520937-38

☎ Cell : +92 322 7665000

(USA OFFICE)KSB INTERNATIONAL

📍 30- N GOULD ST, STE R,
SHERIDAN, WY 82801, USA

✉ E-mail: bilal.saeed@bilalexports.net

🌐 URL: www.bilalexports.net

☎ Cell: +92 322 7665000

(DUBAI OFFICE) KSB INTERNATIONAL GENERAL TRADING LLC

📍 P.O. BOX, 376495 OFFICE NO. 202, AL-MULLA BUILDING DUBAI. UAE

✉ E-mail: bilal.saeed@bilalexports.net

🌐 URL: www.bilalexports.net

☎ Cell: +92 322 7665000

☎ Cell: +971 562394069





M. BILAL EXPORTS



www.bilalexports.net



bilal.saeed@bilalexports.net



+92 322 7665000

